



**INDUSTRIAL RUBBER LTD.**

# PRODUCT GUIDE

Quality • Value • Performance



INDUSTRIAL HOSE



COUPLINGS & CLAMPS



FLEXAUST DUCTING



SHEET RUBBER

[irprubber.com](http://irprubber.com)



**INDUSTRIAL  
RUBBER LTD.**



# INDUSTRIAL RUBBER LTD.

## I.R.P. INDUSTRIAL RUBBER

Serving the North American market for over 65 years , I.R.P. Industrial Rubber is a wholesaler of industrial hose, couplings and clamps, Flexaust hose & ducting, sheet rubber and matting and custom hose products.

## TABLE OF CONTENTS



### INDUSTRIAL HOSE

AIR HOSE.....	2, 3
WATER DISCHARGE HOSE.....	3
WATER SUCTION HOSE.....	3, 4
PETROLEUM & CHEMICAL HOSE.....	4, 5
MATERIAL HANDLING HOSE.....	5, 6
FOOD HANDLING HOSE.....	6, 7
STEAM & WASHDOWN HOSE.....	7
AUTOMOTIVE & MARINE HOSE.....	7, 8
SEWER CLEANING HOSE.....	8
HOSE ACCESSORIES.....	8
AGRICULTURAL HOSE.....	8
WELDING HOSE.....	8
THERMOPLASTIC HOSE.....	8



### COUPLINGS & CLAMPS

CAM & GROOVE COUPLINGS.....	9
BALL VALVES.....	9
CLAMPS.....	9, 10
MENDERS & NIPPLES.....	10
FOOT VALVES & STRAINERS.....	10
AIR COUPLINGS.....	10
SAFETY CABLES.....	10
SWING COUPLERS.....	10
BUSH HOG STYLE COUPLERS.....	10
DIXON BOSS GROUND JOINT.....	10



### FLEXIBLE DUCTING

Page 11, 12



### SHEET RUBBER & MATTING

SHEET RUBBER.....	13, 14
MATTING.....	14
SKIRTBOARD & U-CHANNEL.....	14

[irprubber.com](http://irprubber.com)

CONTACT US

MISSISSAUGA

1-800-387-9537

[sales@irprubber.com](mailto:sales@irprubber.com)

EDMONTON

1-855-785-1227

[saleswest@irprubber.com](mailto:saleswest@irprubber.com)

VANCOUVER

1-877-527-1200

[saleswest@irprubber.com](mailto:saleswest@irprubber.com)

MONTREAL

1-800-470-2664

[salesquebec@irprubber.com](mailto:salesquebec@irprubber.com)



CONTRAMINE MAXX



A very versatile mandrel built air hose for mining, construction and industrial use.

1/2" to 4"

300 PSI

-30°C to +82°C  
(-22°F to +180°F)

EXTRA PRESSURE MAXX



A robust heavy duty 400 PSI air/water hose for use in demanding environments in mining, construction and industrial applications.

1/2" to 2"

400 PSI

-30°C to +100°C  
(-22°F to +212°F)

STEEL MAXX



A mandrel built wire reinforced heavy duty air hose for high pressure pneumatic applications. Built to withstand severe external abuse including mining, construction and industrial use.

1/2" to 4"

600 PSI

-30°C to +80°C  
(-22°F to +176°F)

MINE MAXX EXTRA PRESSURE 400



A premium heavy duty 400 PSI air hose designed with an extra heavy duty cover for the most harsh mining, construction and industrial applications.

1/2" to 4"

400 PSI

-40°C to +82°C  
(-40°F to +180°F)

HERCULES II



Hercules II is an extremely abrasion resistant hose with a wide range of applications in agriculture, factories, mining and many other industrial applications. Non-conductive and MSHA approved.

1/4" to 1-1/2"

500 PSI

-40°C to +100°C  
(-40°F to +212°F)

JACKHAMMER HOSE



A long length air hose for construction and general industry.

1/2" to 1"

300 PSI

-40°C to +82°C  
(-40°F to +180°F)

POLYAIR



A low temperature hose for air, water and mild water-soluble chemicals. Tube and cover are silicone free.

1/4" to 1"

300 PSI

-26°C to +65°C  
(-15°F to +150°F)

TUNDRA LOW TEMP PVC AIR HOSE



Tundra is an ideal low-temp silicon free hose for outdoor air and water applications in cold weather. Specially formulated compounds are engineered to be tough and flexible at very low temperatures.

1/4" to 1/2"

300 PSI

-54°C to +65°C  
(-65°F to +150°F)

CHALLENGER EPDM



An economical EPDM multi purpose hose used in a wide range of air, water, and light agricultural chemical applications. Challenger general service hose is used in construction, marine, agricultural, and industrial applications.

1/4" to 1"

250 PSI

-20°C to +93°C  
(-4°F to +200°F)

EPDM MULTI-PURPOSE HOSE



For air, water, agricultural spray solutions and other dilute chemicals. Good resistance to methyl ethyl ketone. Excellent resistance to heat, weathering and vegetable oils.

1/4" to 2"

150-300 PSI

-40°C to +93°C  
(-40°F to +200°F)

YELLOW CONTRA-AIR



A highly portable, lightweight, high pressure air hose. Contra-Air's nitrile construction makes this product ideal where oil is a factor. Contra-Air's lightweight construction makes this hose ideal to be used as a 1" driller's water supply hose.

3/4" to 4"

200-300 PSI

-30°C to +100°C  
(-22°F to +212°F)

AIR BREATHING HOSE



A specially-designed non-toxic air breathing hose that provides low temperature flexibility and low odour. Hose meets NIOSH(14) requirements for Type C respirator. For use in General Type C air supply lines, paint spray booth, indoor in-plant air service and outdoor open air service.

1/4" to 1/2"

250 PSI

-26°C to +65°C  
(-15°F to +150°F)

GLACIER LOW TEMP MULTI-PURPOSE



A cold weather hose specifically engineered for use in sub-zero applications. It handles air, oil, gasoline, diesel kerosene, fuel oil and some chemicals.

3/4" to 1"

300 PSI

-54°C to 82°C  
(-65°F to 180°F)

SCORPION AIR



Scorpion Air Hose is a premium hybrid polymer air hose designed to remain flexible in cold environments where other PVC hoses may stiffen and crack.

3/8"

300 PSI

-40°C to 82°C  
(-40°F to 180°F)



RUBBER PUSH-ON

**Thermoid**



Oil resistant, general purpose hose for use with push-on fittings.

1/4" to 3/4"

250 PSI

-29°C to +71°C  
(-20°F to +160°F)

RUBBER PUSH-ON MSHA APPROVED

**Thermoid**



This hose is designed for use with robotic welders or any other application requiring MSHA approved flame resistant cover. The 300 PSI hose is oil resistant and non-conductive. It is designed to be used with push-on fittings

3/4" to 1 1/2"

300 PSI

-34°C to +82°C  
(-30°F to +180°F)

WATER DISCHARGE HOSE

FLOW MAXX - CONTRACTORS WATER DISCHARGE

**MAXX**  
INDUSTRIAL HOSE



A medium duty multi-use EPDM water discharge hose used on construction sites and for general water service.

1-1/4" to 12"

75 PSI

-32°C to +82°C  
(-25°F to +180°F)

FLOW MAXX HP - 150 PSI DISCHARGE HOSE

**MAXX**  
INDUSTRIAL HOSE



A heavy duty 150 PSI EPDM rubber water discharge hose for higher pressure dewatering and fluid transfer.


1-3/4" to 8"

150 PSI

-32°C to +82°C  
(-25°F to +180°F)

CONTRAFLEX LAYFLAT HOSE

**MAXX**  
INDUSTRIAL HOSE



Contraflex is manufactured using a 70% Nitrile and 30% P.V.C. blend. Designed for discharging water and oil contaminated water at high pressures. Suitable for handling petroleum products with an aromatic content under 30%.

1-1/2" to 12"

125-200 PSI

-30°C to +95°C  
(-22°F to +203°F)

BROWN PVC LAYFLAT HOSE

**CHALLENGER**



Light weight heavy duty PVC Layflat discharge hose. Hose folds flat for ease of coiling and handling.

1-1/2" - 8"

80-120 PSI

-10°C to +60°C  
(+14°F to +140°F)

BLUE PVC LAYFLAT HOSE

**CHALLENGER**



Light weight standard duty hose for portable pump and irrigation use. Hose folds flat for ease of coiling and handling.

1-1/2" to 10"

35-70 PSI

-10°C to +60°C  
(+14°F to +140°F)

INDUSTRIAL MILL DISCHARGE



An economical pump discharge and washdown hose. Not approved for fire fighting service.

1-1/2" to 4"

150 PSI

-17°C to +82°C  
(0°F to +180°F)

CONTRACTORS WATER DISCHARGE

**Thermoid**



Premium EPDM water discharge hose. Lengths up to 700'.

1/4" to 1-1/2"

150-300 PSI

-40°C to +93°C  
(-40°F to +200°F)

SCORPION WATER

**SCORPION**



Scorpion Water is a premium hybrid garden hose with a polymer construction that allows this hose to remain flexible in cold temperatures.

5/8"

150 PSI

-40°C to 65°C  
(-40°F to 150°F)

WATER SUCTION HOSE

FLOW MAXX - EPDM WATER SUCTION

**MAXX**  
INDUSTRIAL HOSE



Heavy duty 150 PSI EPDM water suction hose that is excellent for construction, quarries, and general use. Suitable for full vacuum.


3/4" to 12"

150 PSI

-32°C to +82°C  
(-25°F to +180°F)

EPDM WATER SUCTION HOSE

**Kanaflex**



A lightweight and flexible hose with an abrasion resistant cover for agricultural chemicals and general industrial use. External helix provides for easy drag. Suitable for full vacuum.

1" to 6"


23-50 PSI

-40°C to +60°C  
(-40°F to +140°F)



## TIGERFLEX TYPE 'BW' PVC SUCTION HOSE

Tigerflex



BW is a low temp PVC suction hose designed to stay flexible at sub-zero temperatures. For service in construction pumps, septic tank and marine pump out service, mining and quarry use.

3/4" to 6"

115 PSI

 -40°C to +65°C  
 (-40°F to +150°F)

## KANALINE BLUE WATER SUCTION

Kanaflex



Heavy duty low temp. PVC suction and discharge with polyester reinforcement for working at higher pressures.

1-1/2" to 4"

115 PSI

 -40°C to +140°C  
 (-40°F to +284°F)

## KANALINE SR SUCTION &amp; DISCHARGE

Kanaflex



Heavy duty suction and discharge hose for use in fish suction and dewatering. Reinforced with polyester for higher working pressures. Suitable for full vacuum.


1-1/2" to 12"

28-110 PSI

 -25°C to +70°C  
 (-13°F to +158°F)

## PVC WATER S &amp; D GENERAL PURPOSE

Tigerflex



Standard duty PVC suction hose for dewatering, agricultural, septic and marine applications.

1-1/2" to 4"

50-70 PSI

 -25°C to +60°C  
 (-13°F to +140°F)

## TIGERFLEX TYPE 'H' PVC SUCTION HOSE

Tigerflex



For construction pumps, septic tank and marine pump out service, mining and quarry use. PVC is resistant to some chemicals, acids and alkalis.

3/4" to 6"

110 PSI

 -20°C to +65°C  
 (-4°F to +150°F)

## PVC WATER S &amp; D GENERAL PURPOSE HD

CHALLENGER



Heavy duty PVC suction hose for dewatering, agricultural, septic and marine applications. The lightweight and flexible hose with clear PVC that allows visual of product being transferred.

1-1/2" to 4"

70 PSI

 -25°C to +60°C  
 (-13°F to +140°F)

## SPA HOSE

Tigerflex



A very flexible hose designed for use in the installation of tubs, spas, swimming pools, filters, and similar water transfer applications.

1/2" to 2"

100 PSI

 -20°C to +65°C  
 (-4°F to +150°F)

## TIGER TAIL PVC SUCTION

FLEXAUST



Crush resistant polyethelene suction hose. Ideal for waste evacuation, septic pumping & sewer cleaning. Made with factory-installed leak proof polyweld cuffs.

1-1/2" to 4"

26 PSI

 -40°C to +60°C  
 (-40°F to +140°F)

## PETROLEUM &amp; CHEMICAL HOSE

## MULTI MAXX

MAXX  
INDUSTRIAL HOSE

This high temperature hose is designed to be used in multiple applications from water suction and discharge to petroleum transfer. The corrugated cover and dual wire helix gives this hose extreme flexibility.

2" to 6"

150 PSI

 -40°C to +121°C  
 (-40°F to +250°F)

## PETRO MAXX - TANK TRUCK

MAXX  
INDUSTRIAL HOSE

An all purpose petroleum full vacuum suction and discharge hose used for gasoline, distillate, kerosene, diesel, oil suspensions, emulsions and other petroleum products with up to a maximum of 50% aromatic content. Also used as a hydraulic suction return line.

3/4" to 6"

150 PSI

 -35°C to +70°C  
 (-31°F to +160°F)

## POLAR MAXX - LOW TEMP TANK TRUCK

MAXX  
INDUSTRIAL HOSE

A low temperature all purpose petroleum suction and discharge hose designed to remain flexible in the harshest of Canadian winters.

1" to 6"

150 PSI

 -50°C to +93°C  
 (-58°F to +199°F)

## FRAC MAXX

MAXX  
INDUSTRIAL HOSE

A rugged hose designed for oilfield service where 250 PSI service is required. It's NBR tube and NBR/CR cover make it ideal for handling a wide range of petroleum products as well as for 98% water and sand mixtures for FRAC tank connections. 4:1 safety factor.

4"

250 PSI

 -32°C to +93°C  
 (-26°F to +199°F)

## CHEM MAXX - ALL CHEMICAL

MAXX  
INDUSTRIAL HOSE

A very versatile hose used for the transfer of chemicals and will handle 90% of known chemicals and petroleum products in both suction and discharge applications.

3/4" to 4"

150 PSI

 -29°C to +66°C (-20°F to +150°F) or  
 -29°C to +82°C (-20°F to +180°F)  
 Depending on media being conveyed

## CHEM MAXX - UHMW

MAXX  
INDUSTRIAL HOSE

A lightweight extremely flexible chemical transfer hose designed for almost every common industrial chemical used in industry today. Non-staining FDA UHMW tube.

1" to 3"

200 to 250 PSI

 -40°C to +121°C  
 (-40°F to +250°F)

## WOLVERINE COMPOSITE HOSE



2" to 4"

Designed for the suction and discharge of a wide range of chemicals. Applications include in-plant liquid transfer, rail car loading as well as tank truck delivery. Supreme flexibility compared to rubber hoses. Hoses are designed for full vacuum and are EN certified.

250 PSI

 -40°C to 100°C  
(-40°F to 212°F)

## PREMIUM FARM TANK



3/4" to 1"

For dispensing gasoline, kerosene and oil from farm or barrel-type pumps found on construction, farm and industrial sites.

60 PSI

 -29°C to +71°C  
(-20°F to +160°F)

## VERSICON OIL RESISTANT



1/4" to 1-1/2"

A non-conductive hose For conveying oil, gasoline, fuel oil and other petroleum derived products.

300 PSI

 -29°C to +82°C  
(-20°F to +180°F)

## PETROLEUM DISCHARGE HOSE



3/4" to 4"

For handling a wide range of petroleum based products, including gasoline, and a number of chemical solutions. Also ideal for air service with oil laden and heated air. Maximum aromatic content 50%.

150 PSI

 -35°C to +82°C  
(-31°F to +180°F)

## KANAFLEX ST 120 LT DROP HOSE



2" to 4"

ST 120 LT is designed as a gasoline tank truck gravity drop hose for such items as naphtha, kerosene, light and heavy oil, diesel and up to 15% gasohol.

65 PSI

 -34°C to +60°C  
(-30°F to +140°F)

## KANAFLEX ST 120 VP VAPOUR RECOVERY



2" to 4"

ST 120 VP is designed as a gasoline vapour recovery hose.

20 PSI

 -40°C to +60°C  
(-40°F to +140°F)

## MATERIAL HANDLING HOSE

## BLAST MAXX - SANDBLAST



1/2" to 3"

This sandblast hose is designed for conveying sand, steel shot and other abrasive materials. Built with a static conductive abrasion resistant tube designed for transferring abrasives at high velocity.

150 PSI

 -35°C to +82°C  
(-31°F to +180°F)

## WEAR MAXX - HD INDUSTRIAL SUCTION HOSE



6" to 10"

An extremely flexible hose designed for hydro excavating trucks and any material handling application where abrasive materials are used.

60 PSI

 -40°C to +82°C  
(-40°F to +180°F)

## BULK MAXX - TAN BULK MATERIAL



2" to 6"

Tan Bulk Material Handling hose is used in the transfer of dry non-oily abrasive materials such as sand, limestone, plastic pellets, sugar, corn, etc. Suitable for full vacuum. Made from FDA Certified material.

75 PSI

 -35°C to +82°C  
(-31°F to +180°F)

## CMC MAXX - CORRUGATED MATERIAL CONDUCTING



2" to 12"

A corrugated material handling hose is designed for abrasive suction and discharge service in mining slurry applications. Utilizes split flanged couplings that allow full flow of material and permits the hose to be easily rotated for even wear.

75 to 150 PSI

 -40°C to +71°C  
(-40°F to +160°F)

## 180AR ABRASION RESISTANT RUBBER SUCTION



1-1/2" to 8"

A flexible suction and discharge hose for dry materials such as sand, crushed rock, cement etc. Suitable for full vacuum with static dissipating properties.

30-45 PSI

 -40°C to +60°C  
(-40°F to +140°F)

## 180BL ABRASION RESISTANCE RUBBER SUCTION



2-1/2" to 6"

Designed for suction and blowing of lightweight abrasives such as rock-wool, fiberglass, sawdust, grain, insulation and cement dust.

18 PSI

 -40°C to +60°C  
(-40°F to +140°F)

## VAC MAXX - INDUSTRIAL VACUUM



1" to 8"

A rugged and extremely flexible industrial vacuum hose designed for light material handling applications.

Full Vacuum PSI

 -35°C to +82°C  
(-31°F to +180°F)

## KANABOOM



4" TO 8"

For use on Hydro-vac trucks, vacuum trucks and general construction use, for wet and dry materials. Full vacuum rated.

75 PSI

 -36°C to 60°C  
(-33°F to 140°F)

## TIGERFLEX UREFLEX-1 MATERIAL HANDLING

Tigerflex



1-1/4" to 8'

Polyurethane lined Ureflex-1 is designed for abrasive applications such as grain handling, sand/shot recovery lines, roof rock cleaning and various other material handling applications. It is formulated out of static-dissipative compounds.

30-50 PSI

 -40°C to +65°C  
(-40°F to +150°F)

## CEMENT MAXX-H BULKMASTER HARDWALL

MAXX  
INDUSTRIAL HOSE

4"

A full vacuum material handling hose with an abrasion resistant tube and is used for the conveying of dry bulk products including chalk, china clay, limestone, ground silica, fullers earth, dry cement, sodium sulphate, lime and fertilizer.

75 PSI

 -35°C to +82°C  
(-31°F to +180°F)

## CEMENT MAXX-S BULKMASTER DISCHARGE

MAXX  
INDUSTRIAL HOSE

3" to 4"

A material handling discharge hose with an abrasion resistant tube and is used for conveying dry bulk products including chalk, china clay, limestone, ground silica, fullers earth, dry cement, sodium sulphate, lime and fertilizer.

75 PSI

 -35°C to +82°C  
(-31°F to +180°F)

## TAR MAXX - HOT TAR HOSE

MAXX  
INDUSTRIAL HOSE

3" to 4"

A transfer hose designed for high heat resistance when transferring hot materials in road paving applications.

150 PSI

 -35°C to +177°C  
(-31°F to +350°F)

## GUNITE

MAXX  
INDUSTRIAL HOSE

1-1/4" to 3"

For conducting dry sand and cement in guniting operations. Also for general material handling applications where a thick cut and abrasion resistant tube is required.

150 PSI

 -35°C to +82°C  
(-31°F to +180°F)

## CONCRETE PLACEMENT

MAXX  
INDUSTRIAL HOSE

1-1/2" to 4"

For conducting plaster, grout, wet cement and concrete at high pressure.

1000 PSI

 -35°C to +82°C  
(-31°F to +180°F)

## FOOD HANDLING HOSE

FOOD MAXX  
EDIBLE LIQUID SUCTION AND DISCHARGEMAXX  
INDUSTRIAL HOSE

1" to 4"

A premium quality FDA nitrile rubber, food grade suction and discharge hose designed to handle most liquid food products including fats and oils without imparting taste, odour or smell. Suitable for full vacuum service.

250 PSI

 -35°C to +93°C  
(-31°F to +200°F)

## PVC FOOD SUCTION / DISCHARGE - SMOOTH

Tigerflex



1" to 6"

Complies with all applicable FDA and 3A requirements. Can be used for any liquids or dry materials. Suitable for full vacuum.

55 PSI

 -20°C to +70°C  
(-4°F to +158°F)

## PVC FOOD SUCTION / DISCHARGE - CORRUGATED

Tigerflex



1" to 6"

Complies with all applicable FDA and 3A requirements. Corrugated for extra flexibility. Can be used for any liquids or dry materials. Suitable for full vacuum.

55 PSI

 -20°C to +70°C  
(-4°F to +158°F)

## WE SERIES PVC FOOD SUCTION W/ STATIC WIRE

Tigerflex



1-1/2" - 6"


A premium FDA corrugated hose with static wire for most pneumatic conveying systems transferring dry powder or granular materials. Static wire for grounding.

30-50 PSI

 Static -20°C to +66°C (-4°F to +150°F)  
Dynamic -10°C to +40°C (14°F to +104°F)

## POLYWIRE VACUUM/ TRANSFER HOSE

Tigerflex



1/4" - 2"

Where full vacuum and a clear non-collapsible hose is required. Can be used for milk, beverages and pharmaceuticals. This product complies with all applicable FDA, 3A, NSF-51 and NSF-61 requirements.

100-250 PSI

 -4°C to +65°C  
(+25°F to +150°F)

## PVC MILK

Kana flex



1-1/2" to 2"

A 3A and FDA hose designed to handle milk in all applications from pick-up to processing plant and many other liquid food materials from water to wine.

66 PSI

 -25°C to +70°C  
(-13°F to +158°F)

## SERIES K3150 CLEAR REINFORCED PVC

Kuri Tec



3/16" to 2"

Used for air, drinking water, mild chemicals and alkalis. This product complies with all applicable FDA, 3A, NSF-51 and NSF-61 requirements.

75-250 PSI

 -4°C to +65°C  
(+25°F to +150°F)

## CLEAR PVC TUBING - FOOD GRADE

Kuri Tec



1/8" to 2"

For handling beverages, food stuffs and liquids where clarity, flexibility and a food grade compound are required. This product complies with FDA, 3A, NSF-51 and NSF-61 requirements.

20-65 PSI

 -4°C to +35°C  
(+25°F to +150°F)



## BREWERS AND BEVERAGE SUCTION HOSE

**MAXX™**  
INDUSTRIAL HOSE


1-1/2" - 2"

For handling beer, wine and fruit juice where taste, odour and smell must not be affected. The extremely smooth tube resists the collection of bacteria. Facilitates easy cleaning.

200-250 PSI

 -35°C to +82°C  
(-31°F to +180°F)

## POLYETHYLENE TUBING - FOOD GRADE



1/4" to 1/2"

Used as instrumentation tubing and as transmission lines for air, liquids and gases. Non corrosive, odourless and tasteless. Food grade.

150 PSI

 -45°C to +60°C  
(-50°F to +140°F)

## STEAM &amp; WASHDOWN HOSE

## STEAM MAXX CHLOROBUTYL 250 STEAM HOSE

**MAXX™**  
INDUSTRIAL HOSE


3/4" to 2"

This chlorobutyl Steam hose has superior resistance to heat aging and improved life expectancy. This extremely flexible hose is designed for transfer of steam up to 250 PSI and 430°F in petrochemical plants, shipyards, oil fields and other industrial applications. Steam hose is manufactured to a 10:1 safety factor.

250 PSI

 -40°C to +221°C (-40°F to +430°F)  
intermittent to 232°C (450°F)

## STEAM MAXX - EPDM STEAM 250 HOSE



1/2" to 2"

An extremely flexible EPDM hose for use with steam at temperatures up to 208°C (406°F). Steam hose is manufactured to a 10:1 safety factor.

250 PSI

 -40°C to +208°C  
(-40°F to +406°F)
CHALLENGER  
STEAM CLEANER / PRESSURE WASH
**CHALLENGER™**


3/8"

Premium steam cleaner hose for Industrial steam cleaning machines and pressure washers.

 steam 350 PSI  
water 3000 PSI


 steam: 165°C / 329°F  
water: 121°C / 250°F

## CHALLENGER PRESSURE WASH HOSE



3/8"

For use with pressure washer machines and equipment with working pressures up to 4000 PSI.

4000 PSI

 -30°C to +121°C  
(-22°F to +250°F)

## WASH MAXX SUPER HOT WATER WASH UP

**MAXX™**  
INDUSTRIAL HOSE


1/2" to 1"

This FDA wash down hose is used for clean-up and hot water washdown services in dairies, meat packing houses, creameries, food processing and bottling plants. Also suitable for steam service under 100 PSI.

100-250 PSI

 -35°C to +82°C  
(-31°F to +180°F)

## GP MAXX GREEN PACKERS WASHDOWN



1/2" to 1"

For washdown service in packing houses, breweries, dairies, fish processing plants, and canneries. Suitable for hot water to 95°C (203°F). Not recommended for pure steam service.

250 PSI

 -40°C to +95°C  
(-40°F to +203°F)

## HOT WATER WASH UP HOSE

**Thermoid™**


1/2" - 3/4"

For general clean-up and hot water washdown service in dairies, meat packing houses, creameries, food processing and bottling plants. Not suitable for steam service.

200-250 PSI

 -40°C to +82°C  
(-40°F to +180°F)

## PAPERMILL WASHDOWN WITH BUILT-ON-NOZZLE



3/4" to 1-1/2"

Suitable for hot or cold water washdown service in paper mills. This hose incorporates an integral built-on smooth tapered rubber nozzle.

250 PSI

 -35°C to +95°C  
(-31°F to +203°F)

## AUTOMOTIVE &amp; MARINE HOSE

## SILICONE AUTO HEATER




1/4" - 1"

A high temperature heater hose used in hostile engine environments, or other industrial applications where temperature is a factor. Meets SAE J20 20R3 Class A.

59-93 PSI

 -54°C to +260°C  
(-65°F to +500°F)

## SILICONE COOLANT HOSE



7/8" to 4"

A coolant hose designed for glycol transfer in areas of high temperatures. Meets SAE J20 R1, class A (1994). Not suitable for oil based products.

40-121 PSI

 -54°C to +177°C  
(-65°F to +350°F)



MARINE MAXX - HARDWALL & SOFTWALL



Used for wet exhaust in pleasure craft marine engine applications. SAE-J2006 USCG R2 Hardwall and R1 Softwall.



1/2" to 6"

60 PSI

-40°C to +100°C  
(-40°F to +212°F)

FLARELOCK GARAGE EXHAUST HOSE



A crush resistant heavy duty exhaust hose made of specially compound rubber to resist heat, aging, gasoline, exhaust fumes and oil. Individual lengths are easily interconnected. When using on vehicles with catalytic mufflers, temperatures can be as high as 600°F.



2" to 4"

25 PSI

400°F (600°F intermittent)

EPDM AUTO HEATER



Standard duty heater hose is used for conveying coolant in automobiles, trucks and buses. Long service life since hoses can withstand the abuse of corrosive additives, ozone and abrasion.



5/8" to 1"

35 PSI

-40°C to +93°C  
(-40°F to +200°F)

FUEL LINE & VAPOUR EMISSION



For conveying fuel in automobiles, trucks and buses. SAE 30R7 type B USC approved fuel line hose. Not designed for marine use with alcohol blended fuels.



3/16" to 5/8"

50 PSI

-34°C to +125°C  
(-29°F to +257°F)

SEWER CLEANING HOSE

SEWER CLEANING HOSE

Sewer Cleaning hose is constructed from materials selected to provide rugged and reliable service under even the most severe and demanding conditions found in high pressure sewer cleaning. Available in standard or high pressure.



3/4" to 1-1/2"

2500 / 3000 PSI

-40°C to +50°C  
(-40°F to +122°F)

CHALLENGER SPIRAL WRAP



Hose protectors provide the safe and economic protections of hydraulics and pneumatic hoses.



1/2" to 5"

Available in black and yellow.

HOSE ACCESSORIES

AGRICULTURAL SPRAY



For spraying or transfer of aqueous or petroleum based herbicides and insecticides, such as LASSO. Cover is pin-pricked to vent vapour and prevent ballooning.



3/8" to 3/4"

200-800 PSI

-10°C to +70°C  
(+15°F to +158°F)

EVA WEED SPRAY



Use for all low pressure agriculture spray applications, including Monsanto LASSO and anhydrous ammonia.



3/8" to 1"

150-300 PSI

-23°C to +65°C  
(-10°F to +150°F)

WELDING HOSE

OXYTUBE SINGLE LINE WELDING



For use with all fuel gases, where a flame and oil resistant tube and cover is required.



3/8" to 3/4"

300 PSI

-10°C to +70°C  
(+15°F to +158°F)

OXYTUBE SINGLE LINE WELDING - R



For use with all fuel gases, where a flame and oil resistant tube and cover is required.



3/8" to 1"

200 PSI

-23°C to +65°C  
(-10°F to +150°F)

THERMOPLASTIC HOSE

100R7 THERMOPLASTIC HOSE



Piranhaflex Series PF354 and PF354NC (for non-conductive applications) are ideal for medium pressure hydraulic hose applications for hydraulic oil and lubrication lines. (-02 and -16 MTO are available upon request). Also available in Twin-Line.



3/16" to 3/4"

1250-3000 PSI

-40°F (-40°C) to 200°F (93°C)

100R8 THERMOPLASTIC HOSE



Piranhaflex Series PF628/PF628NC is ideal for general purpose high pressure hydraulic applications with working pressures of 2,250 to 5,000 PSI. This hose is commonly used in industrial hydraulic construction, material handling, and agricultural equipment. Available in Twin-Line.



1/4" to 3/4"

2250-5000 PSI

-40°F (-40°C) to 200°F (93°C)



ALUMINUM



1/2" to 8"

STAINLESS STEEL



1/2" to 6"

BRASS



1/2" to 4"

POLYPROPYLENE



1/2" to 4"



**Part "A"**  
Male Adapter X  
Female NPT



**Part "B"**  
Female Coupler  
X Male NPT



**Part "C"**  
Female Coupler X  
Hose Shank



**Part "D"**  
Female Coupler  
X Female NPT



**Part "E"**  
Male Adapter X  
Hose Shank



**Part "F"**  
Male Adapter X  
Male NPT



**Part "DC"**  
Dust Cap



**Part "DP"**  
Dust Plug



**Reducer (A)**  
Male Adapter X  
Female NPT



**Reducer (E)**  
Male Adapter  
X Hose Shank



**Reducer (C)**  
Female Coupler  
X Hose Shank



**Reducer (DA)**  
Female Coupler  
X Male Adapter



**Reducer (B)**  
Female Coupler  
X Male NPT



**Spool (AA)**  
Adapter X  
Adapter



**Spool (DD)**  
Coupler X  
Coupler

BALL VALVES

316 STAINLESS STEEL BALL VALVES



1/4" - 2"

1000 WOG full port, 316 stainless steel body and stem stainless steel ball valves. ASTM-CF8-A351 stainless ball with a teflon seat, seals & washers. Comes with an integrated locking handle.

BRASS BALL VALVES - FULL PORT



1/4" - 4"

600 WOG full port forged brass ball valve. Complete with chrome plated brass ball. Teflon seat, seals & washers. Blow out proof stem.

BRASS BALL VALVES - w/ Locking Handle



1/4" - 4"

600 WOG full port forged brass ball valve. Complete with chrome plated brass ball. Teflon seat, seals & washers. Blow out proof stem. Equipped with a locking handle.

BALL VALVES

BRASS BALL VALVES - CSA approved



1/4" - 3"

600 WOG full port forged brass ball valve. UL and CSA approved. Teflon seat, seals & washers with a blow out proof stem.

CLAMPS

ETM & ET GEAR CLAMPS



Shielded gear clamps used to seal silicone hoses without cutting the soft cover. ETM 1/4" band ET 1/2" wide band. 200 stainless band & housing. Carbon steel screw.

HAS & HS GEAR CLAMPS



All stainless gear clamps for use in OEM applications, manufacturing and jobsite repairs. Not recommended for underground applications. HS carbon screw, HAS stainless steel screw.



MAH GEAR CLAMPS



For use in corrosive applications where space is limited. Recommended for underground applications.

CARBON STEEL T-BOLT CLAMPS



Heavy Duty T-Bolt with a stainless steel band and carbon steel bolt and housing have a wide variety of uses such as hydraulic suction and discharge hose.

STAINLESS STEEL T-BOLT CLAMPS



Stainless Steel T-Bolt clamps are used where there is risk of corrosion such as marine, coolant and food applications.

PREFORMED CLAMPS



Double-wrapped and formed to a given diameter, preformed clamps come ready for application. Available in stainless steel and galvanized. Open end clamps also available.

POWERLOCK CLAMPS



Powerlock clamps are for use on PVC suction hoses with a convulater cover. These fittings come in two different configurations. Left hand and right hand spiral.

DOUBLE BOLT CLAMPS



Double bolt clamps are made of plated ductile iron. They are ideal for hose assemblies made on site. They are strong, durable and reusable.

CLAMPS

MENDERS & NIPPLES

SPLIT FLANGE



Two-piece aluminum alloy coupling with full-face integral flange drilled to ASA 150 on both halves. For use with CMC MAXX corrugated material conducting hose.

COMBINATION NIPPLES



Combination nipples are widely used in a variety of low-pressure industrial hose applications.

VICTAULIC STYLE GROOVED NIPPLES



Grooved nipples are widely used in a variety of low-pressure industrial hose applications. For mating with Victaulic style clamps.

MENDERS & NIPPLES

FOOT VALVES & STRAINERS

PIPE NIPPLE



Plated pipe nipples with chamfered ends for connecting mining hose stems and nuts.

BASKET STRAINERS



Round hole basket strainers are made from zinc plated metal. Strainers are used to allow adequate flow without allowing debris that may harm the pump. Non valved.

FOOT VALVE AND STRAINER



Foot valves and strainers are made from cast iron with a rubber flapper that closes to prevent the pump from losing its prime. Ideal for suction pumps using control floats.

AIR COUPLINGS

SAFETY CABLES

UNIVERSAL QUICK ACTING HOSE ENDS



Universal couplings are used in lower pressure air applications such as jackhammers. Male and female ends are available. Universal fittings are produced from malleable iron.

WHIP CHECK SAFETY CABLES



Safety cables are designed to restrain hose assemblies from whipping if a fitting blows out. Small and Large available.

WHIPSOCK CABLES



A new effective way to restrain high pressure hoses. The whip sock has a unique design that prevents the very real and unpredictable whipping of a high pressure hose should the fitting blow out.

SWING COUPLERS

BUSH HOG STYLE COUPLERS

DIXON BOSS GROUND JOINT

SWING COUPLERS



Full flow, negligible loss of pressure. Simple operation, no force required with a compact design. These swing couplers are in accordance with safety standard ISO 4414, EN 983.

BUSH HOG STYLE COUPLERS



Travis Vacuum couplings are used in agriculture, dewatering, transportation and industrial applications.

DIXON BOSS GROUND JOINT COUPLINGS



Ground joint couplings are used in demanding applications such as steam and compressed air. The interlocking clamps lock over the collar on the hose stem to create excellent fitting retention.



### FLX-THANE LD



2" to 18"

.020" wall polyurethane ducting hose supported by a narrow pitch spring steel wire helix. Suitable for air and fume ventilation, vapour recovery system and lightweight materials handling. Clear is manufactured with FDA acceptable material. Clear or black.

A F D M

-54°C to +107°C  
(-65°F to +225°F)

### FLX-THANE MD



2" to 24"

.030" wall polyurethane ducting hose has excellent resistance to abrasion, cutting and gouging for a long product life. It is reinforced with a bronze coated spring steel helix. The ideal hose for lightweight materials handling. Clear is manufactured with FDA acceptable material. Clear or black.

A F D M

-54°C to +107°C  
(-65°F to +225°F)

### FLX-THANE HD



2" to 24"

.045" wall polyurethane heavy duty ducting hose reinforced with a spring steel coated wire helix to create a smooth bend radius (sizes 14" and above not available with a coated wire). Flexible with high abrasion and gouge resistance. Clear is manufactured with FDA acceptable material. Clear or black.

A F D M

-54°C to +107°C  
(-65°F to +225°F)

### FLX-THANE VHD



4" to 24"

.060" wall very heavy duty polyurethane hose reinforced with a spring steel coated wire helix (sizes 14" and above not available with a coated wire) Great abrasion resistance and high tear strength. Ideal for grain handling and severe service applications where flexibility is required.

A F D M

-54°C to +107°C  
(-65°F to +225°F)

### CW-GP DOUBLE PLY



1" to 48"

Double ply neoprene impregnated polyester fabric, reinforced with a spring steel wire helix. It has excellent crush resistance and tensile strength. Excellent for fume extraction and light material handling.

A F D M

-40°C to +121°C  
(-40°F to +250°F)

### T-7




2" to 24"

A thermoplastic rubber general purpose ducting hose for applications such as air and fume transfer, material handling and also has excellent chemical resistance. Ozone resistant.

A F D M

-51°C to +135°C  
(-60°F to +275°F)

### T-7W



2" to 24"

A thermoplastic rubber general purpose ducting hose with a wear strip for applications such as air and fume transfer, material handling and also has excellent chemical resistance. Ozone resistant.

A F D M

-51°C to +135°C  
(-60°F to +275°F)

### T-7 WHITE



2" to 24"

An FDA acceptable medium weight thermoplastic rubber hose reinforced with a spring steel wire helix designed for applications with wide temperature ranges. Great moisture and U.V. resistance.

A F D M

-40°C to +121°C  
(-40°F to +250°F)

### FSP-2



3" to 12"

A double ply flame retardant PVC coated polyester fabric construction with an enclosed spring steel wire helix & external PVC wear strip. FSP-2 offers superior chemical resistance, low friction loss and is flame retardant to UL 94V-0. Also available in single ply.

A F D M

-29°C to +82°C  
(-20°F to +180°F)

### FLEX-TUBE PU



1-1/2" to 12"

Medium weight clear co-extruded ether based polyurethane hose with a rigid yellow external ABS helix. Ultra smooth interior assures efficient airflow. Great abrasion resistance. Excellent wear performance. Puncture & tear resistant with high tensile strength.

A F D M

-40°C to +93°C  
(-40°F to +200°F)

### FLEX-TUBE TR



1" to 10"

Medium weight black co-extruded thermoplastic rubber hose with a rigid black external polypropylene helix. Ultra smooth interior wall assures efficient airflow. Very flexible & crush resistant. Tight bend radius. Moisture & chemical resistant.

A F D M

-51°C to +149°C  
(-60°F to +300°F)

### FLEXSTAT CR



1" to 8"

Static dissipative polyurethane hose reinforced with a rigid white external ABS helix & an embedded copper grounding wire. Extremely flexible with great abrasion resistance. Smooth interior assures minimal friction loss, efficient air flow & elimination of material build-up.

A F D M

-40°C to +93°C  
(-40°F to +200°F)

### R-2



1-1/4" to 18"

A medium wall PVC hose reinforced with a spring steel wire helix. R-2 is designed to make tighter bends and is extremely flexible. Ideal for chemical fume exhausting, light dust collection and moisture applications. Flame retardant to UL-94 VO.

A F D M

-7°C to +71°C  
(+20°F to +160°F)

### FSP-5



4" to 24"

A single ply yellow polyester reinforced PVC vinyl fabric hose construction with an external wear strip reinforced with a spring steel wire helix. Lightweight duct for blower applications. 11:1 highly compressible. High retractability and low friction loss.

A F D M

-29°C to +82°C  
(-20°F to +180°F)



### SD



4" to 60"

Single ply yellow neoprene coated polyester fabric hose reinforced with a spring steel wire helix. Ideal for moving large volumes of air in portable or permanent ventilation/exhaust systems. 12 - 1 compressibility.

A F D M

-54°C to +121°C  
(-65°F to +250°F)

### SDW



4" to 18"

Springflex duct type SDW provides superior performance when it comes to moving large volumes of air. Extremely flexible and lightweight. SDW easily compresses for storage, making it the ideal duct for use with portable and permanent ventilation and exhaust systems.

A F D M

-54°C to +121°C  
(-65°F to +250°F)

### GS



1" to 12"

Double ply silicone coated fiberglass fabric hose reinforced with a spring steel wire helix and external filament fiberglass cord. The narrow pitch allows for tight bending radius while maintaining a smooth air flow. Suited for high temperature air handling.

A F D M

-54°C to +288°C  
(-65°F to +550°F)

### BDS



1" to 6"

Single ply silicone coated fiberglass fabric hose reinforced with a spring steel wire helix and external filament fiberglass cord. The narrow pitch allows for tight bending radius while maintaining a smooth air flow. Suited for high temperature air handling applications.

A F D M

-54°C to +260°C  
(-65°F to +500°F)

### CWGS



2" to 12"

Single ply silicone coated fiberglass fabric hose reinforced with a spring steel wire helix. CWGS is a lightweight flexible ducting which is used for high temp air or fume movement. Available in longer lengths than traditional mandrel-built hose.

A F D M

-54°C to +288°C  
(-65°F to +550°F)

### FLEX-LOK 550



3" to 20"

Single ply silicone coated fiberglass fabric hose mechanically crimped in a continuous process. Metal strip acts as a wear strip and offers outstanding external abrasion resistance. Extremely flexible & compressible.

A F D M

-54°C to +260°C  
(-65°F to +500°F)

### FL-1050



3" to 20"

Double ply construction silver aluminum coated fiberglass fabric hose with a silver coloured heat-resistant fiberglass liner mechanically crimped in a continuous process. Extreme temperature resistance with excellent heat stability. 1050 degree F.

A F D M

-54°C to +566°C  
(-65°F to +1050°F)

### FLEX-LOK 1200



3" to 20"

Double ply red wire inserted fiberglass fabric hose mechanically crimped in a continuous process. Extreme temperature resistance with excellent heat stability. 1200 degree F.

A F D M

-40°C to +649°C  
(-40°F to +1200°F)

### DPZ



1-1/4" to 2"

A lightweight polyethylene copolymer hose reinforced with an integral polyethylene helix. DPZ's has a smooth interior, which assures efficient air flow and good flexibility with tight bending characteristics. It also has superior external abrasion resistance and is crush resistant.

A F D M

-40°C to +60°C  
(-40°F to +140°F)

### COMMERCIAL



1-1/4" to 4"

Grey or black polyethylene copolymer hose reinforced with an integral polyethylene helix. The unique design provides exceptional abrasion resistance without sacrificing flexibility. The smooth interior and exterior allows for easy handling, storage and high flow rates.

A F D M

-40°C to +60°C  
(-40°F to +140°F)

### SUPER FLEX VAC



3/4" to 6"

High strength fiber reinforced PVC hose cover bonded to coated spring steel wire helix. Offers flexibility for easy handling and installation. Great for industrial and commercial vacuum cleaners and ventilating or cooling industrial machinery.

A F D M

-29°C to +66°C  
(-20°F to +150°F)

### MARK 2



1-1/2" to 4"

Medium weight clear polyethylene hose reinforced with a translucent integral polyethylene helix. Ideal for insulation blowing applications. Easy to handle. Translucent walls offer easy monitoring of material flow and blockage.

A F D M

-40°C to +60°C  
(-40°F to +140°F)

### CONNECTORS



### BRIDGE CLAMPS



### J-LOCKS



### LATCH LOCKS




**RED SHEET**


Smooth finish general purpose rubber used for gaskets. Not suitable for petroleum or chemicals.

80 SHORE "A" +/- 5

250%

Gauge: 1/16" to 1/4"

 -20°C to 80°C  
 (-4°F to 176°F)

**FABRIC FINISH RED SHEET**


Fabric finish general purpose rubber used for gaskets. Not suitable for petroleum or chemicals.

80 SHORE "A" +/- 5

250%

Gauge: 1/16" to 1/4"

 -20°C to 80°C  
 (-4°F to 176°F)

**SBR**



SBR rubber offers resistance to abrasion and impact. SBR rubber sheet has good vibration and sound insulating properties. Not suitable for petroleum products.

60 SHORE "A" +/- 5

300%

Gauge: 1/16" to 2"

 -30°C to 77°C  
 (-22°F to 170°F)

**NEOPRENE**



Specifically formulated to provide moderate oil and petroleum based solvent resistance. Excellent ozone resistance.

60 SHORE "A" +/- 5

300%

Gauge: 1/32" to 2"

 -30°C to 82°C  
 (-22°F to 180°F)

**C.I. PACKING RUBBER**



C.I. packing rubber which is made of synthetic fabric maintains the properties of our SBR rubber with the added benefit of woven nylon cloth for added puncture resistance, stability and tear strength.

70 SHORE "A" +/- 5

300%

Gauge: 1/16" to 1/4"

 -30°C to 70°C  
 (-22°F to 158°F)

**NEO NYLON**


Neoprene rubber with nylon reinforcement, which is used to enhance tear resistance and durability.

60 SHORE "A" +/- 5

300%

Gauge: 1/16" to 1/4"

 -30°C to 82°C  
 (-22°F to 180°F)

**PURE GUM**


Pure gum rubber has excellent abrasion and tear resistance. It also has superior resilience, tensile and elongation characteristics. Not suitable for outdoor or petroleum products.

40 SHORE "A" +/- 5

600%

Gauge: 1/16" to 1"

 -40°C to 70°C  
 (-40°F to 158°F)

**RED-STAR**


Non-marking red natural rubber. This product has excellent abrasion and tear resistance. It also has superior resilience, tensile and elongation characteristics. Not suitable for outdoor or oil resistant applications.

40 SHORE "A" +/- 5

600%

Gauge: 1/16" to 1/2"

 -40°C to 70°C  
 (-40°F to 158°F)

**BLACK NITRILE**


Also known as BUNA N, Black Nitrile is the polymer of choice for applications which require superior resistance to oils, solvents, gasoline and other hydrocarbon chemicals.

60 SHORE "A" +/- 5

300%

Gauge: 1/16" to 1/2"

 -30°C to 88°C  
 (-22°F to 190°F)

**WHITE NITRILE**



White Nitrile is made from FDA compound and is specially formulated to be non-marking. Commonly used in the food and pharmaceutical industries. Oil and grease resistant.

60 SHORE "A" +/- 5

300%

Gauge: 1/16" to 1/2"

 -30°C to 88°C  
 (-22°F to 190°F)

**EPDM**


EPDM provides superior properties for outdoor and high ozone environment applications. EPDM rubber is also resistant to acids, alkali and ketones. Consult IRP's chemical chart for compatibility.

60 SHORE "A" +/- 5

500%

Gauge: 1/16" to 1/2"

 -30°C to 104°C  
 (-22°F to 220°F)

**SILICONE**


For both extreme heat and extreme cold. Silicone has good weather and ozone resistance. Made from FDA approved material.

60 SHORE "A" +/- 5

400%

Gauge: 1/16" to 1/4"

 -50°C to 200°C  
 (-58°F to 392°F)

**VITON**


Commercial grade black "Viton" sheet provides excellent resistance to heat, oil and chemicals. "Viton" sheet is well suited for hot grease, engine and compressor type applications.

70 SHORE "A" +/- 5

200%

Gauge: 1/16" to 1/4"

 -30°C to 180°C  
 (-22°F to 356°F)

**URETHANE**


Our most abrasion resistant product. High tensile and elongation.

80 SHORE "A" +/- 5

603%

Gauge: 1/8" to 1/4"

 -29°C to 71°C  
 (-20°F to 160°F)



**HYPALON**



This synthetic rubber offers exceptionally good resistance to weather, ozone, sunlight and oxidation. Hypalon has excellent properties for alkalis and acids. See IRP chemical chart for compatibility.

60 SHORE "A" +/- 5

300%

Gauge: 1/8" to 1/4"

-30°C to 120°C  
(-22°F to 248°F)

**BUTYL**



Outstanding resistance to gases and vapour. Butyl also has very good resistance to heat, oxygen, ozone, alkalis and oxygenated solvents.

70 SHORE "A" +/- 5

300%


Gauge: 1/8" to 1/4"

-20°C to 100°C  
(-4°F to 212°F)



**MATTING**

**FINE RIB MATTING**



1/8" thick fine rib rubber matting. 24", 36" and 48" widths.


70 SHORE "A" +/- 5

300%

Gauge: 1/8" to 1/4"

-20°C to 80°C  
(-4°F to 176°F)

**WIDE RIB MATTING**



1/8" thick wide rib rubber matting. 24", 36" and 48" widths.


70 SHORE "A" +/- 5

300%

Gauge: 1/8"

-20°C to 80°C  
(-4°F to 176°F)

**HEX ANTI FATIGUE MATTING**



This matting is designed specifically to give relief from ankle, knee, hip and back pain. It provides excellent stress relief for workers who are stationary for long periods of time on hard floor surfaces.


60 SHORE "A" +/- 5

300%

Gauge: 5/8"

-20°C to 70°C  
(-40°F to 158°F)

**NITRILE HEX ANTI FATIGUE MATTING**



For areas exposed to oil. This matting is designed specifically to give relief from ankle, knee, hip and back pain. It provides excellent stress relief for workers who are stationary for long periods of time on hard floor surfaces.

60 SHORE "A" +/- 5

500%

Gauge: 5/8"

-25°C to 90°C  
(-13°F to 194°F)



**SKIRTBOARD & U-CHANNEL**

**SKIRTBOARD**



Cut to width Skirtboard rubber is an abrasion resistant rubber designed for use as skirting on conveyor belt systems.

80 SHORE "A" +/- 5

Gauge: 1/4" to 1"

-20°C to 80°C  
(-4°F to 176°F)

**U-CHANNEL**



U-Channel is used primarily as a protective edge for shaker screens in aggregate applications.

70 SHORE "A" +/- 5

-20°C to 100°C  
(-4°F to 212°F)

**U-CHANNEL POLYURETHANE**




Polyurethane U-Channel is a premium high abrasion resistant product used primarily as a protective edge for shaker screens in aggregate applications.

70 SHORE "A" +/- 5

-20°C to 100°C  
(-4°F to 212°F)

**URETHANE SKIRTBOARD**




Polyurethane Skirtboard is a highly abrasion resistant product designed for use as skirting on conveyor belt systems.

70 SHORE "A" +/- 5

Gauge: 1/2"

-20°C to 100°C  
(-4°F to 212°F)

**TANK STRIPPING**




Neoprene tank strips with holes punched to seal between bolted panels on tanks. Sizing is as per the part number- available in 1/8", 1/4" or 3/8"

70 SHORE "A" +/- 5

FIX

-20°C to 100°C  
(-4°F to 212°F)

**CUSTOM FABRICATION**

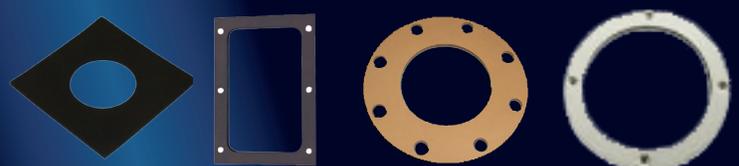



# INDUSTRIAL RUBBER LTD.

## MISSISSAUGA, ON

6300 Edwards Blvd. Unit #1 - L5T 2V7  
TOLL FREE: 1-800-387-9537  
LOCAL: 905-670-5700  
sales@irprubber.com

## EDMONTON, AB

4243 - 53 Avenue NW - T6B 3P4  
TOLL FREE: 1-855-785-1227  
LOCAL: 780-485-1227  
saleswest@irprubber.com

## VANCOUVER, B.C.

1525 Broadway St. Unit #120 - V3C 6P6  
TOLL FREE: 1-877-527-1200  
LOCAL: 604-472-1200  
saleswest@irprubber.com

## SAINT-LAURENT, QC

1760, Rue Beaulac - H4R 1W8  
TOLL FREE: 1-800-470-2664  
LOCAL: 514-789-2822  
salesquebec@irprubber.com



**INDUSTRIAL HOSE**

**PLIFLEX**  
SHEET RUBBER

**CHALLENGER™**

**SCORPION**



[irprubber.com](http://irprubber.com)

I.R.P INDUSTRIAL RUBBER

[maxxhose.com](http://maxxhose.com)

MAXX INDUSTRIAL HOSE

DISTRIBUTED BY: